

REMANUFACTURED ARCLINE S

Extruded Aluminium Luminaire

We are offering up to **1500 meters of linear suspended lighting** recently acquired from a high-end UK office. These luminaires are manufactured from extruded aluminium and have an efficient, low glare diffuser. They are in excellent condition and have only been used for a short period of time.

We offer two pricing options for the lighting:

Pricing will be confirmed upon receipt of your purchase order*



UK
CA

Remanufactured In accordance with BS 8887

1. Remanufacture option: Includes a full remanufacturing process. The product will be cleaned, tested and reassembled, returning it to like-new condition with a new UKCA mark and warranty. **Remanufacture price: £100 per meter.**

Benefits:

- New UKCA mark and warranty
- Like-new condition for 30% less
- Opportunity to upgrade functionality

1

2. Testing option: Involves a safety test to ensure that the lighting is in working order. The lighting will not come with a warranty, but it will be returned with a certificate of testing. **Testing price: £35 per meter.**

Benefits:

- Safety Certification
- Immediate availability
- Reduced cost

2

PRODUCT FEATURES:



- Ceiling suspended
- Extruded aluminium body
- Class A energy efficient
- L80 50.000 hours life time
- LED lumen output between 3,100—11,650 lm
- IP20 rated
- 5 years warranty
- Electrostatic powder coated aluminium reflector which also acts as a heat sink
- Low-glare, matt opal micro prismatic diffuser (UGR ≤ 19)

TECHNICAL DETAILS:

| LUMINAIRE DETAILS | | | CAT. | LOR | Lamp Details | | Im _{TOT} /luminaire | W _{CCT} /luminaire | Lamp Lm/WCCT /luminaire | Luminaire Lm*/WCCT /luminaire |
|-------------------|---------------------|---|------|------|--------------|----|---------------------------------|--------------------------------|-------------------------------|-------------------------------------|
| REF | AREA USED | DESCRIPTION | | | CCTk | Ra | | | | |
| V1 | CAT A Floorplate | Suspended, LED, 4000K, individual/continuous lighting system. Extruded aluminium. C/W thin diffusion Lense behind microprism lens to reduce | A | 0.91 | 4000 | 80 | 6579lm | 46W | 117.00 | 153.45 |

Technical details to be confirmed following your enquiry*

Configured to form continuous illuminated runs to dimension to suit design. Plug and play internal wiring between sections.

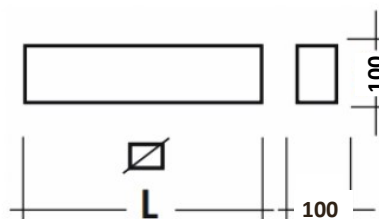

Certificate No:410652023