


REMANUFACTURED SPOTLIGHT

We are offering up to **600 Spotlights** recently collected from a large department store in Manchester. Stylish luminaire that will fit smoothly into any retail environment. They are in excellent condition and have only been used for a short period of time.

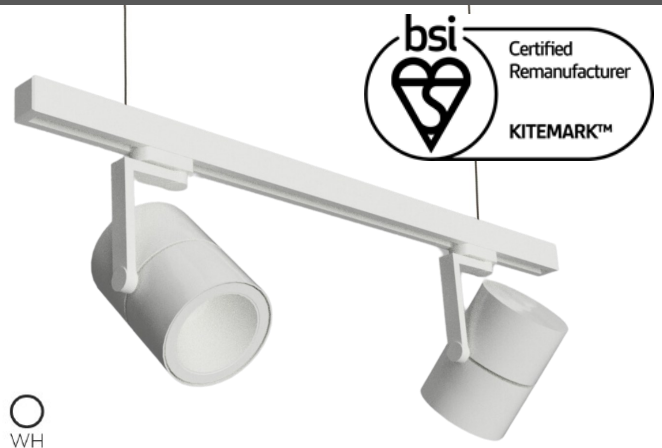

REMANUFACTURE

Remanufacture in accordance with BS 8887-220: Includes a full remanufacturing process. The product will be cleaned, tested and reassembled, returning it to like-new condition with a new UKCA mark and warranty.

- New UKCA mark and warranty
- Like-new condition for 30% less
- Opportunity to upgrade functionality




PRODUCT FEATURES

- Suitable to be suspended or surface mounted
- Beam angle: Wide
- Turn ° 360, Tilt ° 90, Beam angle ° 40
- Housing in powder coated aluminium, white (RAL 9016). Integrated driver.
- Suitable for Global Trac® Pro 3-circuit, can be adapted for use with other tracks on request.
- On/Off, in-track DALI dimming
- Photometric parameters available on enquiry
- Remanufactured according to BS 8887-220
- Assessed to BS EN 60598-2-1
- Mounting: Track
- Original Manufacturer: FAGERHULT
- Warranty: 5 years

TECHNICAL DETAILS

Type code	IL065-CAS
Description	Remanufactured track-spot 'TOUCH MIDI G2 FLOOD (WHITE)' - Casambi
Fuse	None
Light source lumens (lm)	3220 @ 85C
Power Consumption (W)	29.6
Current Consumption (A)	0.13
CCT (K)	4000
CRI	80+Ra
IP Rating	IP20
Electrical Class	Class I
Ambient Temperature Range (°C)	25°C
Rated Life (h)	50,000 h
Input Characteristics (mA)	230 V(ac)~50Hz
Power Factor	0.96
Embodied Carbon (kgCo2e)	9.4 (vs 31.2 for equivalent new product)
For Usage	Normal
Fixed / Portable / Adjustable	Adjustable

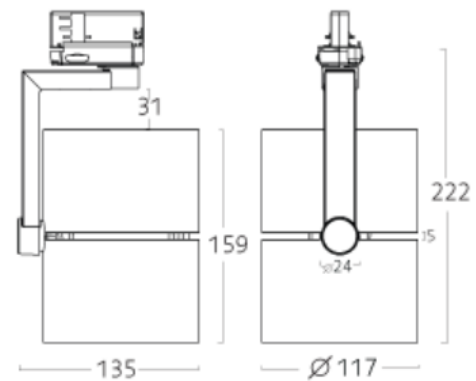

DIMENSIONS

Length, mm 117 Width, mm 136
Height, mm 256 Weight, kg 1.2

