

REMANUFACTURED PANEL

We have sourced up to 240 high-performance panel luminaires from a retrofitted office in Birmingham. This is an excellent opportunity to give new life to these LED's. We are ready to transport them to our facility and upgrade them to meet your desired spec.



REMANUFACTURE

Remanufacture in accordance with BS 8887-220: Includes a full remanufacturing process. The product will be cleaned, tested and reassembled, returning it to like-new condition with a new UKCA mark and warranty. The LED's and drivers will be replaced and upgraded on 100% of units, leaving you to spec output and control options.

- New UKCA mark and warranty
- Like-new condition for 30% less
- Opportunity to upgrade functionality




PRODUCT FEATURES

- Low energy consumption
- Opal high uniformity optics option in 3000 kelvin and 4000 kelvin
- Cost-cutting solution avoids hassle of revamping
- Easy to install
- All the typical benefits of LED
- Housing: Powder coated steel
- Optics in acrylic (PMMA)
- Electronic Driver
 - CD (current driver)
 - CS-DIM 1-10V
 - CD-DA (DALI)
 - Emergency 3H on request

TECHNICAL DETAILS

Description	Remanufactured recessed direct LED luminaire, 600x600mm, steel to fit specified ceiling system.
Optics	Direct: Opal diffuser, acrylic.
Light source lumens (lm)	2200lm, 4200lm
Power Consumption (W)	27W, 52W
Efficacy	90lm/W
CCT (K)	3000K/4000K
CRI	80+Ra
SDCM	3
IP Rating	IP20
Electrical Class	Class I
Ambient Temperature Range (°C)	25°C
Rated Life (h)	L70/> 50,000 h
Emergency	3H on request
Embodied Carbon & Material Savings	To be confirmed upon sample review

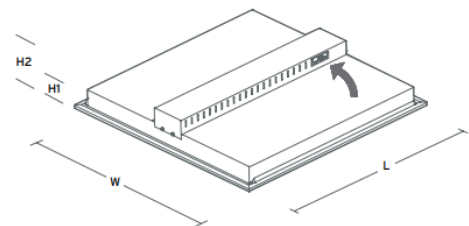

	Profile	Module	L	W	H1	H2
LED	T/L	300x300	295	295	52	90
LED	T/L	600x600	595	595	52	90
LED	C	600x600	599	599	52	90
LED	T/L	625x625	620	620	52	90
LED	C	625x625	624	624	52	90
LED	T/L	1200x300	1195	295	52	90

