

REMANUFACTURED LINEAR

Extruded Aluminium Luminaire

We are offering up to **1000 meters of linear suspended lighting** recently acquired from a high-end UK office. These luminaires are manufactured from extruded aluminium and have an efficient, low glare diffuser. They are in excellent condition and have only been used for a short period of time.



50K
HOURS

5 YEAR
WARRANTY

90+
CRI

4000K
NEUTRAL WHITE

IP20



Remanufactured In accordance with BS 8887

REMANUFACTURE

Remanufacture in accordance with BS 8887-220: Includes a full remanufacturing process. The product will be cleaned, tested and reassembled, returning it to like-new condition with a new UKCA mark and warranty.

- New UKCA mark and warranty
- Like-new condition for 30% less
- Opportunity to upgrade functionality





PRODUCT FEATURES:

- Ceiling suspended
- Extruded aluminium body
- Class A energy efficient
- L80 50.000 hours life time
- LED lumen output between 2440 - 5000 lm/m
- IP20 rated
- 5 years warranty
- Electrostatic powder coated aluminium reflector which also acts as a heat sink
- Low-glare, matt opal micro prismatic diffuser (UGR ≤ 19)

TECHNICAL DETAILS:

LUMINAIRE DETAILS - Ref IR119

| | |
|-------------------|-----------------------------------|
| Description | Ceiling Suspended Linear LED |
| Dimensions | H=75mm W=56mm Wt=1.97Kg |
| IP Rating | IP20 |
| lm output | 2440lm/m (2400 - 5000lm optional) |
| LED current | 270mA |
| LED voltage | 32-34V |
| Power consumption | 18.8W/m |
| Power factor | 0.98 |
| THD | 11.5% |
| CCT (K) | 4000K |
| CRI | 90+ |
| Rated Life (h) | > 50,000 h - L80 - B10 (Ta 25°C) |

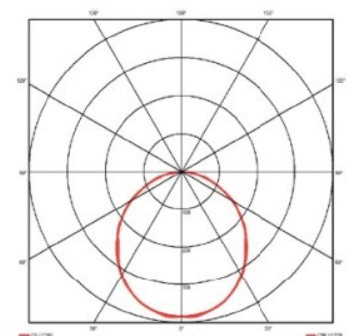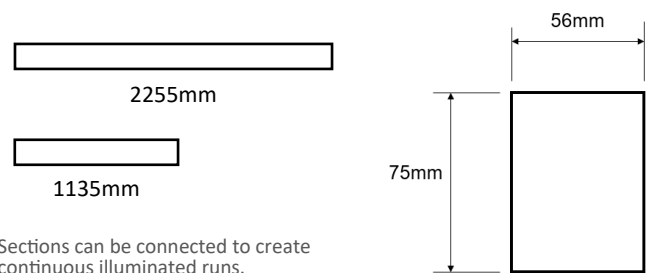

Technical details to be confirmed following your enquiry*